

INDIVIDUAL SPECIFICATION SHEET

Product Name: Transient Voltage Suppressors

Part Number: SMFJ 200W Series

Revision: A



Dongguan TLC Electronic Technology Co., LTD

No.18,5th GaoLi Road,TangXia Town,DongGuan,GuangDong,P.R China 523710

TEL: 86-0769-3892 0511

FAX: 86-0769-8793 2077

Http: www.tlcet.com.cn

Rev.	Effective Date	Changed Contents
A	2018-11-29	New Release

☞ The individual specification sheet are the property of Dongguan TLC electronic technology Co.,Ltd and shall not be copied or used as commercial purposes without permission.

PREPEARED BY

APPROVED BY




DESCRIPTION:

TVS diodes can be used in a wide range of applications which like consumer electronic products, automotive industries, munitions, telecommunications, aerospace industries, and intelligent control systems.

FEATURES:

- ✧ Glass passivated or planar junction
- ✧ Excellent clamping capability
- ✧ Repetition rate (duty cycle): 0.01%
- ✧ Typical I_R less than $1\mu A$ above 10V.
- ✧ Low profile package and low inductance
- ✧ 200W Peak Pulse power capability at $10 \times 1000\mu s$ waveform.
- ✧ Fast response time: typically less than 1.0ps from 0V to V_{BRmin} .
- ✧ High temperature soldering: $260^\circ C/10s$ at terminals.
- ✧ Plastic package has Underwriters Laboratory Flammability 94V-0.
- ✧ For surface mounted applications in order to optimize board space

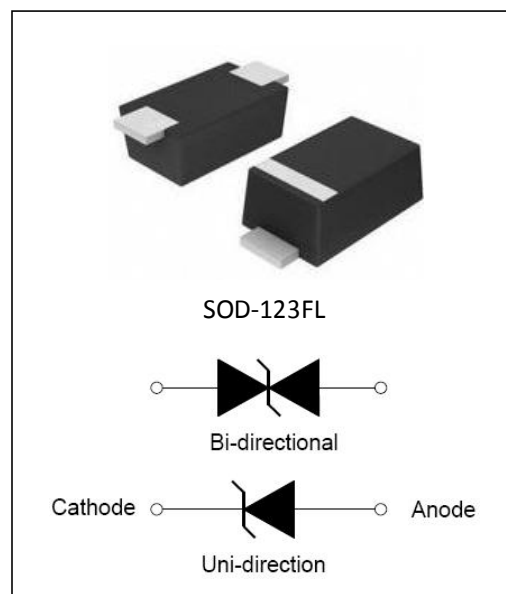

ABSOLUTE MAXIMUM RATINGS ($T_A=25^\circ C$, RH=45%-75%, unless otherwise noted)

Parameter	Symbol	Value	Unit
Storage temperature range	T_{stg}	-55 to +150	$^\circ C$
Operating junction temperature range	T_j	-55 to +150	$^\circ C$
Steady state power dissipation at $T_L=75^\circ C$	$P_{M(AV)}$	2.8	W
Peak pulse power dissipation on 10/1000 μs waveform	P_{PP}	200	W
Maximum Instantaneous Forward Voltage at 20A for Unidirectional	V_F	5.0	V

ELECTRICAL CHARACTERISTICS (T_A=25°C)

Part Number		V _R	I _R @ V _R	V _{BR} @I _T		I _T	V _C @I _{PP}	I _{PP} ^①
Uni-Polar	Bi-Polar	V	μA	min(V)	max(V)	mA	max(V)	A
SMFJ5.0A	SMFJ5.0CA	5.0	150	6.40	7.00	10	9.2	21.7
SMFJ6.0A	SMFJ6.0CA	6.0	100	6.67	7.37	10	10.3	19.4
SMFJ6.5A	SMFJ6.5CA	6.5	100	7.22	7.98	10	11.2	17.9
SMFJ7.0A	SMFJ7.0CA	7.0	50	7.78	8.60	10	12.0	16.7
SMFJ7.5A	SMFJ7.5CA	7.5	50	8.33	9.21	1	12.9	15.5
SMFJ8.0A	SMFJ8.0CA	8.0	20	8.89	9.83	1	13.6	14.7
SMFJ9.0A	SMFJ9.0CA	9.0	5	10.00	11.10	1	15.4	13.0
SMFJ10A	SMFJ10CA	10.0	2	11.10	12.30	1	17.0	11.8
SMFJ11A	SMFJ11CA	11.0	1	12.20	13.50	1	18.2	11.0
SMFJ12A	SMFJ12CA	12.0	1	13.30	14.70	1	19.9	10.1
SMFJ13A	SMFJ13CA	13.0	1	14.40	15.90	1	21.5	9.3
SMFJ14A	SMFJ14CA	14.0	1	15.60	17.20	1	23.2	8.6
SMFJ15A	SMFJ15CA	15.0	1	16.70	18.50	1	24.4	8.2
SMFJ18A	SMFJ18CA	18.0	1	20.00	22.10	1	29.2	6.8
SMFJ20A	SMFJ20CA	20.0	1	22.20	24.50	1	32.4	6.2
SMFJ22A	SMFJ22CA	22.0	1	24.40	26.90	1	35.5	5.6
SMFJ24A	SMFJ24CA	24.0	1	26.70	29.50	1	38.9	5.1
SMFJ26A	SMFJ26CA	26.0	1	28.90	31.90	1	42.1	4.8
SMFJ28A	SMFJ28CA	28.0	1	31.10	34.40	1	45.4	4.4
SMFJ30A	SMFJ30CA	30.0	1	33.30	36.80	1	48.4	4.1
SMFJ33A	SMFJ33CA	33.0	1	36.70	40.60	1	53.3	3.8
SMFJ36A	SMFJ36CA	36.0	1	40.00	44.20	1	58.1	3.4
SMFJ48A	SMFJ48CA	48.0	1	53.30	58.90	1	77.4	2.6
SMFJ51A	SMFJ51CA	51.0	1	56.70	62.70	1	82.4	2.4
SMFJ58A	SMFJ58CA	58.0	1	64.40	71.20	1	93.6	2.1

① Surge waveform: 10/1000μs

V_R : Stand-off Voltage -- Maximum voltage that can be applied V_{BR}:

Breakdown Voltage

V_C: Clamping Voltage -- Peak voltage measured across the suppressor at a specified I_{pp} I_R:

Reverse Leakage Current

ORDERING INFORMATION

SMFJ	xx	C	A
200W SOD Series	V_R Voltage	C: Bi-directional	5% V_{BR} Voltage tolerance

RATINGS AND V-I CHARACTERISTICS CURVES ($T_A=25^\circ\text{C}$, unless otherwise noted)

FIG.1: V- I curve characteristics (Uni-directional)

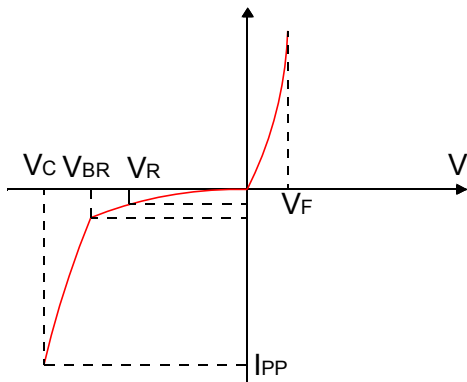


FIG.2: V- I curve characteristics (Bi-directional)

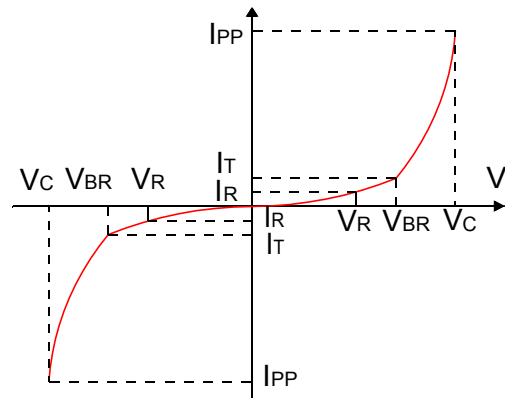


FIG.3: Pulse waveform



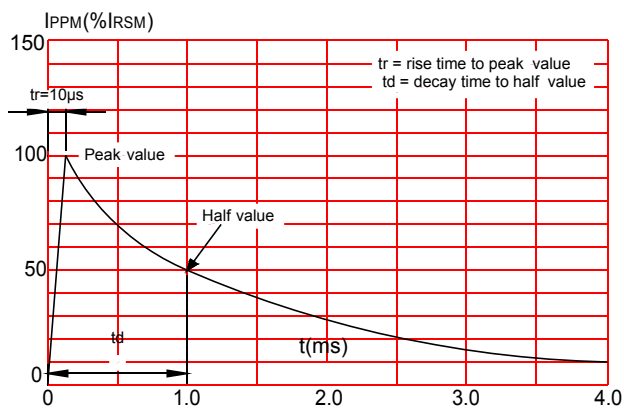


FIG.4: Pulse derating curve

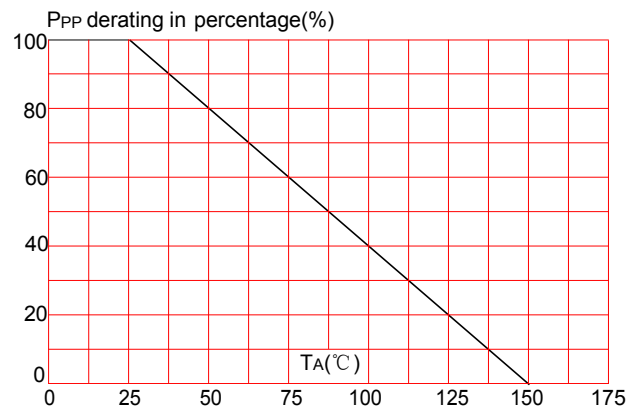


SOLDERING PARAMETERS

Reflow Condition		Pb-Free assembly (see FIG.5)
Pre Heat	-Temperature Min ($T_{s(min)}$)	+150°C
	-Temperature Max($T_{s(max)}$)	+200°C
	-Time (Min to Max) (t_s)	60-180 secs.
Average ramp up rate (Liquid us Temp (T_L) to peak)		3°C/sec. Max
$T_{s(max)}$ to T_L - Ramp-up Rate		3°C/sec. Max
Reflow	-Temperature(T_L)(Liquid us)	+217°C
	-Temperature(t_L)	60-150 secs.
Peak Temp (T_P)		+260(+0/-5)°C
Time within 5°C of actual Peak Temp(t_P)		30 secs. Max
Ramp-down Rate		6°C/sec. Max
Time 25°C to Peak Temp (T_P)		8 min. Max
Do not exceed		+260°C

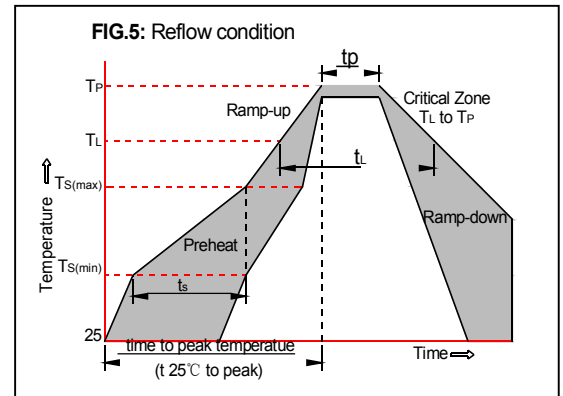

PACKAGE MECHANICAL DATA

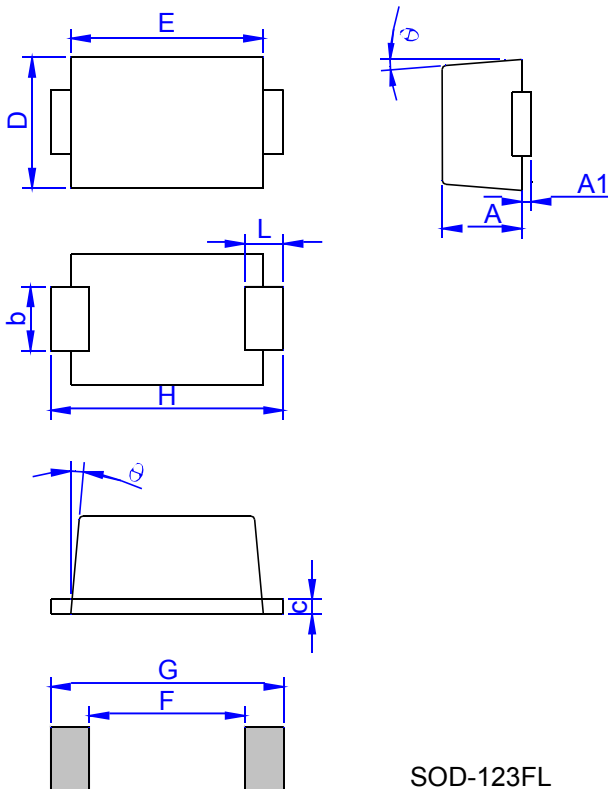

Ref.	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	0.90	1.00	0.035	0.039
A1	0	0.10	0	0.004
b	0.70	1.10	0.028	0.043
c	0.10	0.20	0.004	0.008
D	1.50	1.80	0.059	0.071
E	2.50	2.90	0.098	0.114
F	2.36	-	0.093	-
G	4.19	-	0.165	-
H	3.40	3.80	0.134	0.150
L	0.55	0.95	0.022	0.037
θ	0	8°	0	8°